



201 - 39500  
202 - 41,00  
203 - 2200

A

PATENT LAW OFFICES  
OF  
WALTER L. BEAVERS  
326 SOUTH EUGENE STREET  
GREENSBORO, NORTH CAROLINA 27401  
U.S.A.

TELEPHONE (910) 275-7601  
FACSIMILE (910) 275-2009  
EMAIL walterb@spyder.net

INTELLECTUAL PROPERTY LAW  
INCLUDING  
PATENT, TRADEMARK CAUSES

21 October 1997

Case Docket No. 01838-01

Box Patent Application  
Assistant Commissioner For Patents  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the utility patent application  
of:

Inventors: **Steven L. Reeder and Michael A. Reeder**

For: **WINDOW, MUNTIN AND METHOD**

Enclosed are:

1. One copy of Specification, Declaration and Power of Attorney.
2. One copy of a verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
3. Three (3) sheets of drawings.
4. Information Disclosure Statement and one (1) reference.
5. Assignment and assignment recordation cover sheet.
6. My check number 11914 in the amount of \$498.00 for the filing fee and assignment recording fee.

The filing fee was calculated as follows:


201 - 39500  
202 - 41,00  
203 - 2200

Commissioner of Patents  
21 October 1997  
Page two

Item	Number of claims	Number of extra claims	Fees (small entity)
Basic fee			395.00
Total claims	22	2	22.00
Independent claims	4	1	41.00
Multiple dependent claims			
<b>TOTALS</b>	22	3	\$458.00

The Commissioner is hereby requested to bill for additional charges during the pendency of this application to the address as shown above.

Respectfully submitted,

  
Walter L. Beavers  
Registration No. 26,704

Assistant Commissioner For Patents  
Box Patent Application  
Washington, D.C. 20231

Your petitioners, **Steven L. Reeder** and **Michael A. Reeder**, citizens of the United States and residents of the city of Salisbury, State of North Carolina, whose post office addresses are 3075 Stokes Ferry Road, Salisbury, North Carolina 28146 and 4930 Millbridge Road, Salisbury, North Carolina 28146 respectively pray that Letters Patent may be granted to them for improvements in a **WINDOW, MUNTIN AND METHOD** as set forth in the following specification.

## WINDOW, MUNTIN AND METHOD

### BACKGROUND OF THE INVENTION

#### Field of the Invention

This invention pertains to a decorative window muntin contained between two hermetically sealed panes of glass and a method for making the same.

#### Description of The Prior Art And Objectives Of The Invention

In recent years, glass making and installing has progressed to allow large panes of window glass to be installed, whereas, previously, small panes were individually framed and supported within a window structure known by those in the industry as true divided lite (TDL). This TDL arrangement became unnecessary with utilization of large panes. For example, whereas, previously, a one meter by one meter window glass may have been made of nine individual panes of glass, now one pane is used.

While the science of glass and window making was advancing to allow larger panes of glass to be used, similar advances occurred in energy efficient windows, and hermetically sealed insulated glass windows have become increasingly popular. Such windows have parallel spaced panes of glass to provide insulation and increase energy conservation. These windows are commonly referred to as having insulated glass (IG) as two normal panes of glass are combined to form one pane of IG.

In an effort to make the appearance of the new IG windows match older windows, decorative muntins formed from metal are placed between the panes of glass in IG. These muntins do not provide any support; they are purely decorative. In this manner the IG windows look like TDL windows while providing the insulative properties desired by today's window owners and fabricators.

Problems sometimes arise in IG windows as strong sunlight or heated temperatures raise the temperature inside the sealed glass. Moisture in the muntin vaporizes and often recondenses on the inside surface of the glass pane, causing a fog-like effect which "clouds" the glass. Because the glass is sealed, cleaning or rubbing will not remove this clouding. The escape of moisture or liquid from the muntin is commonly referred to as "outgassing" and has been the cause of much dissatisfaction in the window fabrication and installation industry. Likewise, this problem has required the replacement of many IG windows which become opaque with moisture.

While outgassing is less of a problem with conventional aluminum muntins, another problem arises in the manufacture of aluminum muntins for use in IG windows. Aluminum can be difficult to bend using present technology, and some shapes are just not possible to create using aluminum. This is important in oddly shaped windows. Where aluminum can be used, it is frequently a multipiece assembly which raises manufacturing and assembly costs.

Other problems arise in the expansion and contraction of conventional muntins as they undergo temperature changes in installed windows. Some muntins expand too rapidly when heated and buckle within

the IG. At other times when the expanded muntin attempts to contract, the warp or buckle has become permanent and is unsightly.

Therefore with these and other problems known, it is an objective of the present invention to provide a muntin for use in an IG window which does not cause or allow outgassing.

It is a further objective of the present invention to provide a muntin within an IG window which is pleasing to the consumer's eye.

It is still a further objective of the present invention to provide a muntin which is easy to manufacture through the use of Computer Aided Design (CAD) tools.

It is another objective to provide a muntin with low expansion characteristics and which has high memory.

It is yet another objective to provide an abrasive resistant muntin which is inexpensive to manufacture.

It is still a further objective to provide a one piece muntin that is ready to be placed within a window without additional assembly steps.

It is yet a further objective to provide a method of making a muntin with the above described characteristics.

Various other objectives and advantages of the invention will become readily apparent to those skilled in the art upon further reference to the detailed description below.

## SUMMARY OF THE INVENTION

The aforesaid and other objectives are realized by a window muntin machined from a non-metal material, preferably polystyrene, although polyurethane or wood may be acceptable, which is easily machined using CAD technology. The machined muntin is painted with a latex paint and baked until the moisture is removed and the paint has dried. The baked muntin is then placed between two panes of glass and hermetically sealed therein as is usual in the art. This glass unit is then available for mounting in a conventional window assembly.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a front elevational view of the preferred embodiment of the decorative muntin of the invention;

Fig. 2 illustrates a bottom plan view of the muntin along lines 2-2 of Fig. 1;

Fig. 3 demonstrates a front elevational view of the muntin of Fig. 1 mounted between panes of glass in an IG window;

Fig. 4 features a cross-sectional view of the window of Fig. 3;

Fig. 5 depicts an alternate embodiment of a muntin in a pane of insulated glass mounted in a window; and

Fig. 6 shows a cross-sectional view of the window of Fig. 5 along lines 6-6.

**DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS  
AND OPERATION OF THE INVENTION**

---

Turning now to the drawings, specifically Figs. 1 and 2 show decorative window muntin 10, the preferred embodiment. Non-metal window muntin 10 is preferably machined from a .476 cm thick sheet of polystyrene, although other polymeric or non-metal materials such as polyurethane or wood may be acceptable, into a desired shape such as the radial display seen in Fig. 1, although other shapes and designs can be employed. Window muntin 10 includes a plurality of arms 11, each including end 12. Placed into each end 12 is cylindrical pin 13, which is preferably formed from aluminum .238 cm in diameter and 1.27 cm long. Pins 13 are received by cylindrical channels 14 which are preferably .238 cm in diameter and .635 cm deep, so that approximately one-half the length of each pin 13 extends from each channel 14. Pin 13 is centrally located on end 12 for optimum stability. Paint layer 15 (Fig. 2) completely surrounds and coats window muntin 10. Paint layer 15 is preferably conventional pigmented latex paint. It is within the scope of the present invention to use conventional clear or unpigmented sealants such as a polyurethane or other varnishes in place of paint 15.

After window muntin 10 is painted and heat cured as explained in the preferred method below, it is ready to be placed in insulated window 20 as seen in Figs. 3 and 4. Insulated window 20 comprises two parallel, opposing conventional glass plies 21 and 21' disposed in conventional wooden or aluminum window frame 25. Glass plies 21 and 21' are spaced one from the other by conventional sealant 22, such as a two part polyurethane finish which hermetically seals plies 21 and 21' together. Spacer 24, formed from rolled aluminum preferably from 1.27



cm to 1.905 cm thick hold plies 21 and 21' apart and is placed inside, but flush against sealant 22, and includes a number of cylindrical channels 23 equal to the number of pins 13 on muntin 10 and spaced around spacer 24 according to the location of pins 13 on muntin 10. Channels 23 are, preferably, .238 cm in diameter and .635 cm deep to accommodate pins 13 as best seen in Fig. 4. As can be easily understood, pins 13 hold muntin 10 in the proper position when placed and secured in channels 23 and 14. Spacer 24 and muntin 10 are sandwiched between glass plies 21 and 21' as sealant 22 hermetically seals muntin 10 therein as is conventional and well understood in the art.

Window muntin 30, an alternate embodiment, is shown in Figs. 5 and 6. Muntin 30 includes arms 31 with pins 32 much like muntin 10. Pins 32 fit into channels 33 of arms 31 and channels 41 of spacer 42. Glass plies 43 and 43' sandwich muntin 30 therebetween and are sealed with sealant 44. Frame 45 surrounds and obscures sealant 44 and spacer 42 from normal vision. Likewise, pins 32 are hidden from normal vision by muntin 30. It is to be understood, that while not shown, muntin 30 also has a layer of paint surrounding and sealing muntin 30 to prevent outgassing.

While only two embodiments of the present invention are shown, it is to be understood that any number of configurations or geometrically shaped windows, and muntins sized to fit such windows are possible and within the scope of the present invention. While glass is the preferred transparent ply, other plies such as polyacrylic, polycarbonates or the like may be used. The spacer would be resized and the channels in the spacer rod would be repositioned to accommodate the pins. Likewise,

there is no particular muntin cross section preferred. A simple rectangle is shown in Fig. 2, but other conventional shapes are contemplated.

In the preferred method of making decorative window muntin 10, a cross section is chosen such as rectangular cross-section seen in Fig. 2. The dimensions of this cross-section are programmed into a conventional CAD program that can be downloaded into a three to five axis CNC router (not shown) such as those sold by CR Onsrud Inc. of Huntersville, North Carolina. A planar sheet of high impact polystyrene, preferably .476 cm thick and of a size large enough to accommodate the desired pattern or configuration is placed on a cutting table (not shown) and secured. The cutting unit on the router is then engaged and the desired pattern is cut, so that an unfinished, but machined muntin 10 is created.

Using a conventional electric drill (not shown) with a .238 cm diameter drill bit, channels 23 are drilled .635 cm deep into the center of ends 12 of muntin 10. Pins 13 are inserted and secured in ends 12 with a conventional adhesive. Muntin 10 is cleaned using a conventional solvent such as an ethyl or other alcohol solution to remove any dust or oils from the cutting procedures. Muntin 10 is then coated with a conventional water-based latex paint such that layer of paint 15 is formed thereon. This is preferably done in a conventional spray booth. All sides of muntin 10 should be so coated with a light to medium coat of paint and allowed to completely air dry.

After drying, muntin 10 is then preferably heat cured or baked at 220 °F or 104.4 °C for twenty to thirty minutes so as to force the gases

contained within muntin 10 to be driven out or be sealed therewithin. By this procedure, only an extremely low percentage of volatiles remains which can later cause outgassing. Muntin 10 is then placed between two plies of glass 21 and 21' as earlier described and is hermetically sealed or sandwiched between plies of glass 21 and 21' for use in a conventional window, such as window 20.

The preceding recitation is provided as an example of the preferred embodiment and an alternate embodiment for illustrative purposes and is not meant to limit the nature or scope of the present appended claims. Variations of the invention are anticipated by those skilled in the art.

We claim:

1. A method for forming a decorative window muntin, said method comprising the steps of:

- a) cutting a polymeric material into a desired configuration;
- b) coating the polymeric material; and
- c) heating the polymeric material.

2. The method as claimed in claim 1 wherein cutting a polymeric material into a desired configuration comprises the step of cutting a sheet of polystyrene.

3. The method as claimed in claim 1 wherein coating the polymeric material comprises spray painting the polymeric material with a latex paint.

4. The method as claimed in claim 1 further comprising the step of placing the polymeric material between two panes of glass.

5. The method as claimed in claim 5 further comprising the step of hermetically sealing the two panes of glass.

6. The product made by the method of claim 1.

7. A window comprising:

two panes of glass and a decorative muntin, said muntin including an end, said muntin comprising a coating layer, said muntin sandwiched between said panes of glass and hermetically sealed therein.

8. The window as claimed in claim 7 further comprising an aluminum pin, said pin positioned on said end of said muntin.

9. The window as claimed in claim 7 wherein said muntin is polystyrene and said coating layer is latex paint.

10. A method for making a decorative window muntin, said method comprising the steps of:

- a) cutting a polymeric material into a desired configuration;
- b) cleaning the cut polymeric material;
- c) coating the cleaned polymeric material; and
- d) baking the polymeric material.

11. The method as claimed in claim 10 wherein cutting a polymeric material into a desired configuration comprises the step of cutting a planar sheet of polystyrene.

12. The method as claimed in claim 10 wherein cleaning the cut polymeric material comprises the step of wiping the cut polymeric material with alcohol.

13. The method as claimed in claim 10 wherein coating the cleaned polymeric material comprises spraying the polymeric material with a latex paint.

14. The method as claimed in claim 10 further comprising the step of placing the polymeric material between two panes of glass.

15. The method as claimed in claim 14 further comprising the step of

hermetically sealing the two panes of glass.

16. The method as claimed in claim 10 further comprising the step of placing a pin the cut polymeric material.

17. The method as claimed in claim 16 wherein placing a pin comprises the step of placing an aluminum pin.

18. A muntin for use in a window comprising a non-metal, planar member, said planar member conforming to the window, and a coating, said coating covering said planar member, wherein said coating prevents the escape of volatiles from said planar member upon heating.

19. The muntin of claim 18 formed from polystyrene.

20. The muntin of claim 18 wherein said coating is latex paint.

21. The muntin of claim 18 formed from wood.

22. The muntin of claim 18 formed from polyurethane.

### ABSTRACT OF THE INVENTION

A non-metal window muntin formed from plastic or wood is described for use in hermetically sealed insulated glass windows. The process for forming the muntin includes machining polystyrene sheets which are painted with a latex pain and baked prior to use between sealed glass of the window.

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Attorney Docket No. 01838-01

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **WINDOW, MUNTIN AND METHOD**, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is known to be material to the examination and patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed: none.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney to prosecute this application and transact all business in the Patent and Trademark Office connected therewith and direct all correspondence and telephone calls to:

Walter L. Beavers  
Registration No. 26,704  
326 South Eugene Street  
Greensboro, North Carolina 27401  
(910) 275-7601

Inventor:

Steven L. Reeder  
Steven L. Reeder

10/16/97  
Date

Residence And  
Post Office Address:

3075 Stokes Ferry Road  
Salisbury, North Carolina 28146

Citizenship:

USA

Inventor:

Michael A. Reeder  
Michael A. Reeder

10/16/97  
Date

Residence And  
Post Office Address:

4930 Millbridge Road  
Salisbury, North Carolina 28146

Citizenship:

USA

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney Docket No:

01838-01

Applicant:

Steven L. Reeder et al.

Serial No:

Filed:

For:

WINDOW, MUNTIN AND METHOD

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
STATUS (37 CFR 1.9(f) AND 1.27 (c))-SMALL BUSINESS CONCERN**

I hereby declare that I am an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN:

CUSTOM GLASS PRODUCTS OF CAROLINA, INC.

ADDRESS OF CONCERN:


1475 Harrison Road  
Salisbury, North Carolina 28147

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for the purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled **WINDOW, MUNTIN AND METHOD** by inventors **STEVEN L. REEDER** and **MICHAEL A. REEDER** described in the specification filed herewith.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. [37 CFR 1.28(b)]

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

  
Steven L. Reeder, President

10/16/97  
Date

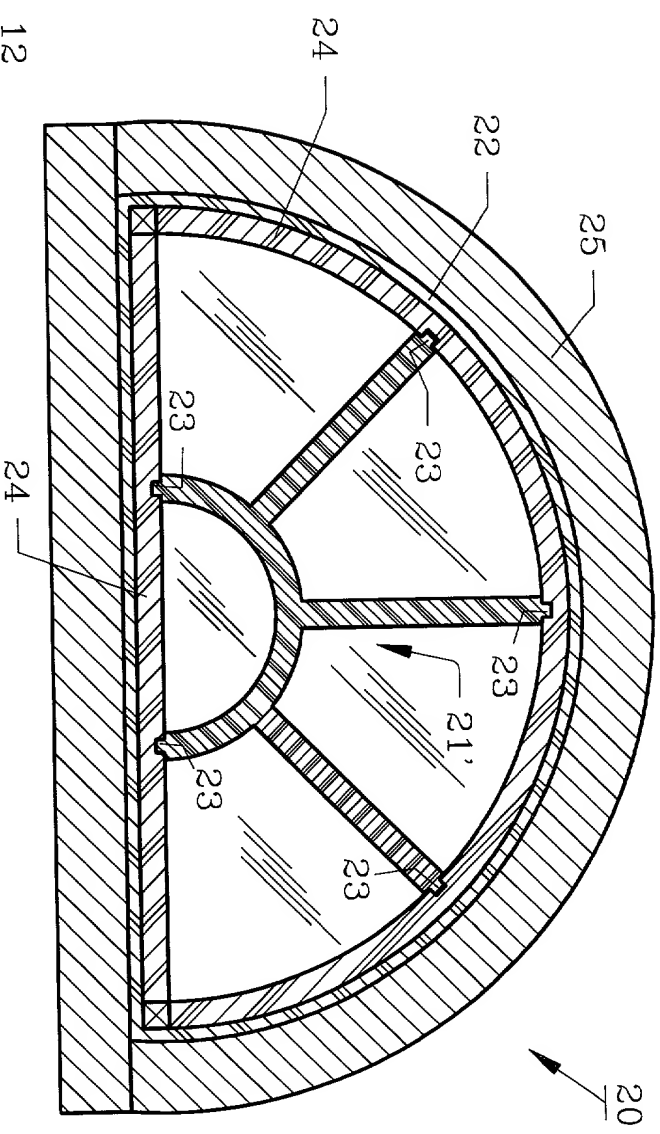


FIG. 4

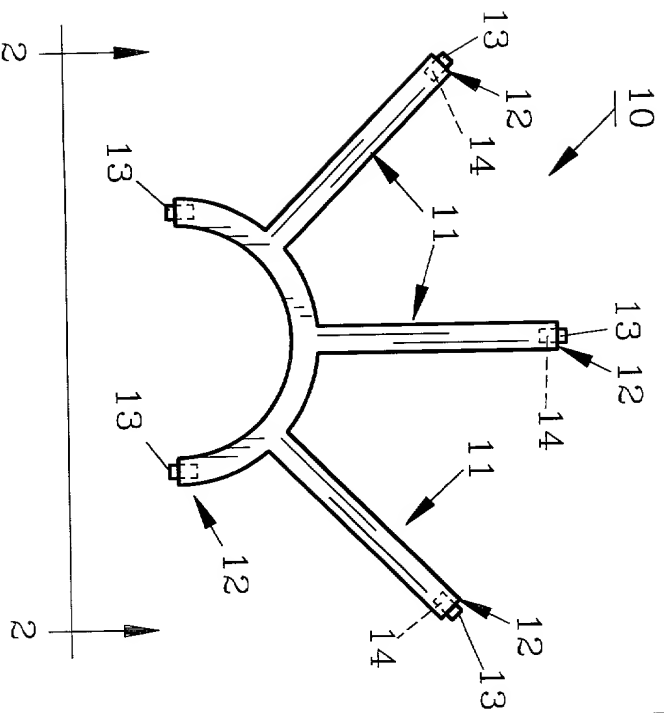


FIG. 1

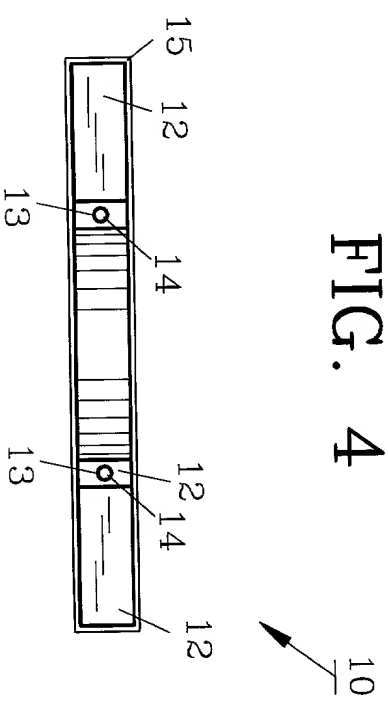


FIG. 2




FIG. 3

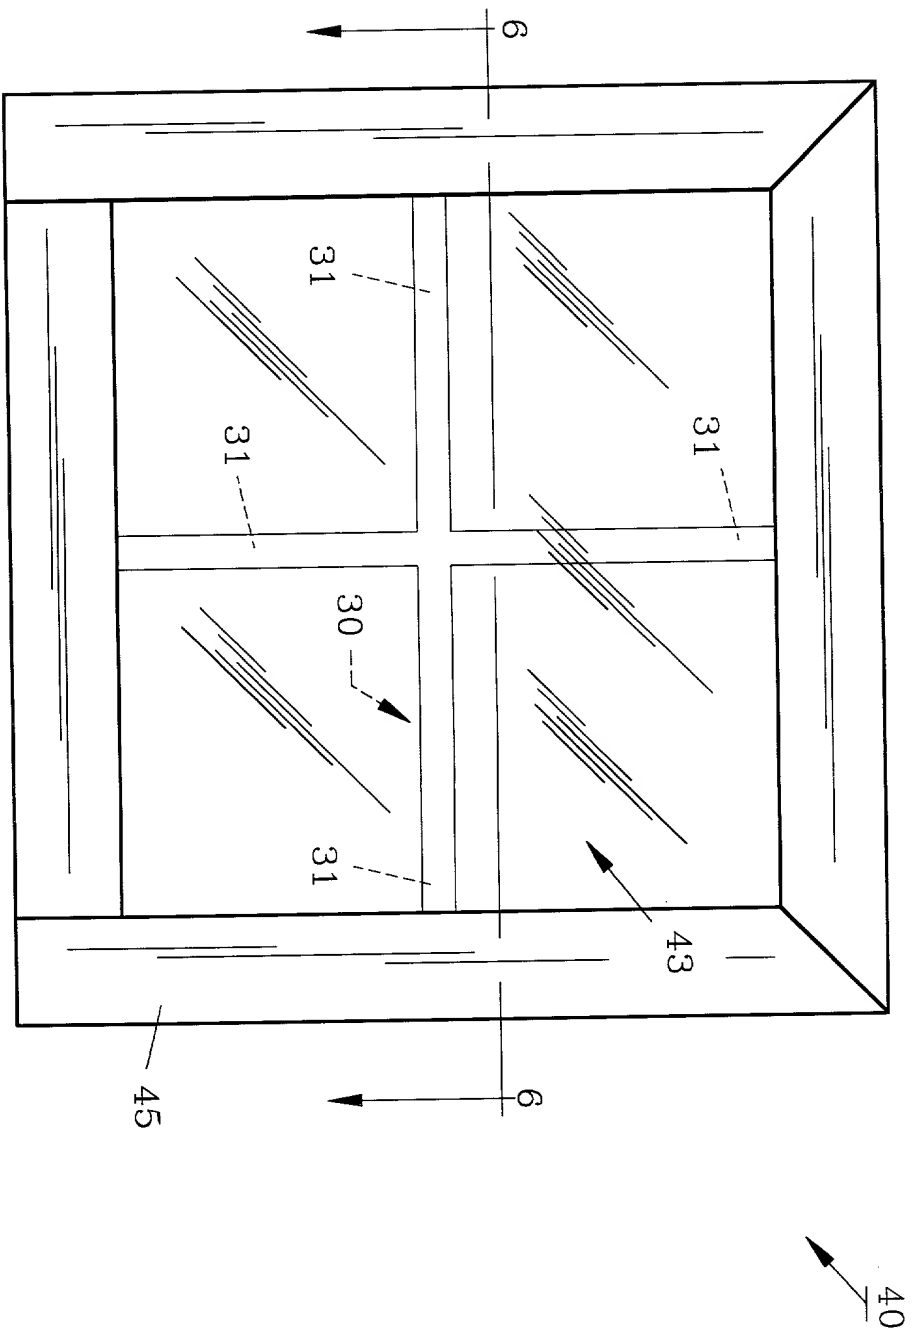


FIG. 5

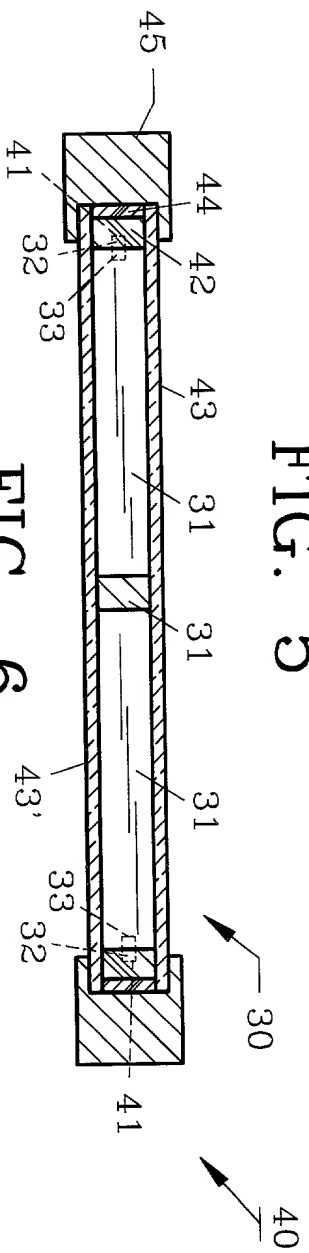


FIG. 6

US 6,749,499 A